Distributed by:

JAMECO® ELECTRONICS

www.Jameco.com ✦ 1-800-831-4242

The content and copyrights of the attached material are the property of its owner.

Jameco Part Number 211246 (RC-260RA-2670)

MABUCHI MOTOR

RC-260RA/SA

OUTPUT: APPROX 0.4W~20W

Carbon-brush motors

Typical Applications **Home Appliances** : Massager / Vibrator
Toys and Models : Radio Control Model



MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY					STALL		
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE		OUTPUT	TORQUE		CURRENT
			r/min	A	r/min	A	mN·m	g·cm	W	mN·m	g·cm	A
RC-260RA-18130	4.5 ~ 6.0	4.5V CONSTANT	9800	0.14	7750	0.53	1.48	15.1	1.20	7.06	72	2.00
RC-260RA-2670	3.0 ~ 4.5	4.5V CONSTANT	18500	0.30	15290	1.43	2.14	21.8	3.41	12.3	125	6.80
RC-260SA-2670	3.0 ~ 4.5	4.5V CONSTANT	13700	0.24	11520	1.27	2.66	27.1	3.20	16.7	170	6.70
RC-260SA-2295	3 ~ 6	4.5V CONSTANT	10200	0.20	8300	0.87	2.43	24.7	2.11	13.0	133	3.80

UNIT: MILLIMETERS

DIRECTION OF ROTATION

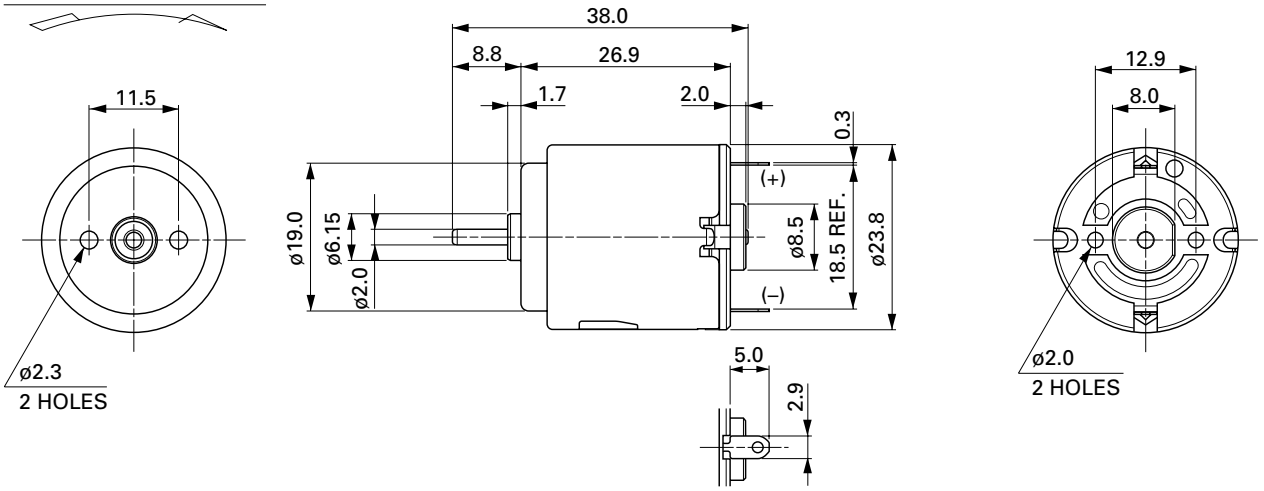

WEIGHT: 28g (APPROX)

RC-260RA-18130 4.5V

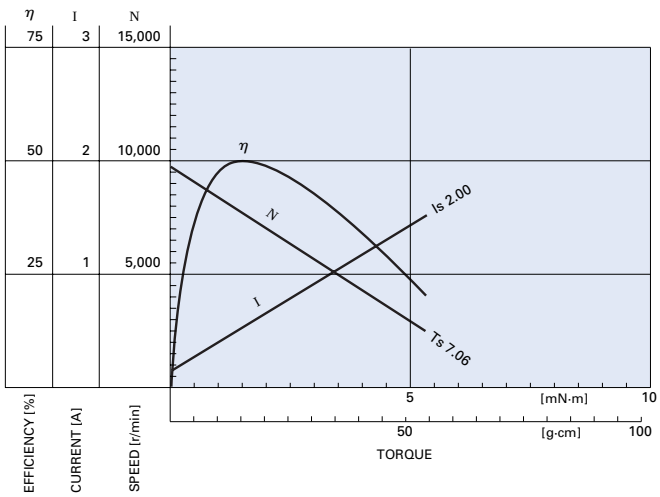

RC-260SA-2670 4.5V

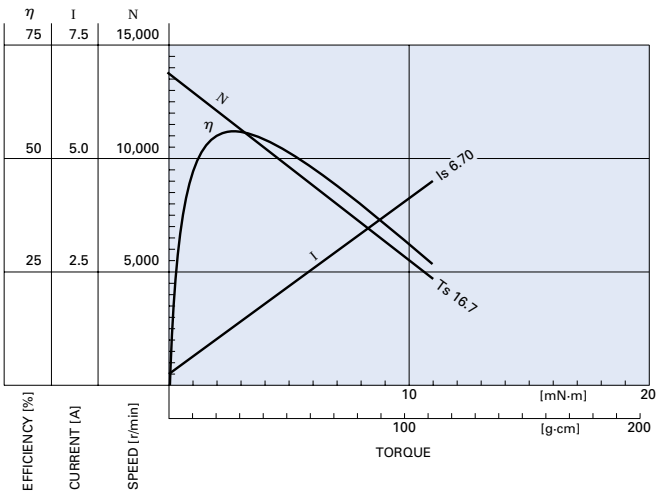

MABUCHI MOTOR CO., LTD. **Headquarters** 430 Matsuhidai, Matsudo-shi, Chiba-ken, 270-2280 Japan Tel:81-47-384-9523 Fax:81-47-385-2026 (Sales Dept.)